

FFWD RAW SPECSHEET

BEST OF THE BEST

Disc Brake Compatible	Yes								
Rim Brake Compatible	No								
Innertube compatible	Yes								
Tubeless Compatible	Yes								
Tubular Compatible	No								
Hub Type	DT Swiss 180 EXP (1:1)								
Campa Option	Yes								
Shimano Option	Yes								
XDR Option	Yes								
Microspline Option	No								
Axle Dimensions***	Front 12x100 / Rear 12x142								
Disc Rotor Interface	Centerlock								
Bearing Type	Cartridge; SINC Ceramic								
Bearing Usage	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Front</td> <td>2x 6802-2RS</td> </tr> <tr> <td>Rear DS</td> <td>1x 26157-2RS</td> </tr> <tr> <td>Rear NDS</td> <td>1x 6802-2RS</td> </tr> <tr> <td>Freehub</td> <td>2x 6802-2RS</td> </tr> </table>	Front	2x 6802-2RS	Rear DS	1x 26157-2RS	Rear NDS	1x 6802-2RS	Freehub	2x 6802-2RS
Front	2x 6802-2RS								
Rear DS	1x 26157-2RS								
Rear NDS	1x 6802-2RS								
Freehub	2x 6802-2RS								


DT180 EXP CERAMIC

Rimtype	Full Carbon Clincher						
ETRTO	21 - 622						
Rim Depth	44mm						
Rim Internal Width	21mm						
Rim External Width	30mm						
Min. Valve Length	60mm						
Min. Tyre Size	23mm						
Max. Tyre Size	42mm						
Max. Tyre Pressure*	8,3Bar / 120PSI						
Max. Rider Weight	120kg / 265lbs						
Weight**	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Front</td> <td>650 gram</td> </tr> <tr> <td>Rear</td> <td>770 gram</td> </tr> <tr> <td>Set</td> <td>1420 gram</td> </tr> </table>	Front	650 gram	Rear	770 gram	Set	1420 gram
Front	650 gram						
Rear	770 gram						
Set	1420 gram						
Aeroshape	Yes, LAW TECH						
Rimtape	Tubeless tape; 27mm						

LAW TECH AERO PROFILE

Spoke type	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Front NDS</td> <td>DT Aerolite</td> </tr> <tr> <td>Front DS</td> <td>DT Aerolite</td> </tr> <tr> <td>Rear NDS</td> <td>DT Aerocomp</td> </tr> <tr> <td>Rear DS</td> <td>DT Aerocomp</td> </tr> </table>	Front NDS	DT Aerolite	Front DS	DT Aerolite	Rear NDS	DT Aerocomp	Rear DS	DT Aerocomp
Front NDS	DT Aerolite								
Front DS	DT Aerolite								
Rear NDS	DT Aerocomp								
Rear DS	DT Aerocomp								
Spoke style	Straightpull								
Nipple type	DT Pro Lock Hidden Alloy								
Spoke Count	Front 24 / Rear 24								
Spoke length (front)	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">NDS</td> <td>284mm (12x)</td> </tr> <tr> <td>DS</td> <td>286mm (12x)</td> </tr> </table>	NDS	284mm (12x)	DS	286mm (12x)				
NDS	284mm (12x)								
DS	286mm (12x)								
Spoke length (rear)	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">NDS</td> <td>284mm (12x)</td> </tr> <tr> <td>DS</td> <td>286mm (12x)</td> </tr> </table>	NDS	284mm (12x)	DS	286mm (12x)				
NDS	284mm (12x)								
DS	286mm (12x)								
Spoke Pattern	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Front NDS</td> <td>2 Cross</td> </tr> <tr> <td>Front DS</td> <td>2 Cross</td> </tr> <tr> <td>Rear NDS</td> <td>2 Cross</td> </tr> <tr> <td>Rear DS</td> <td>2 Cross</td> </tr> </table>	Front NDS	2 Cross	Front DS	2 Cross	Rear NDS	2 Cross	Rear DS	2 Cross
Front NDS	2 Cross								
Front DS	2 Cross								
Rear NDS	2 Cross								
Rear DS	2 Cross								
Spoke Tension	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Front NDS</td> <td>1100N</td> </tr> <tr> <td>Rear DS</td> <td>1100N</td> </tr> </table>	Front NDS	1100N	Rear DS	1100N				
Front NDS	1100N								
Rear DS	1100N								
Color Options	MBL/GRY								

TUBELESS READY

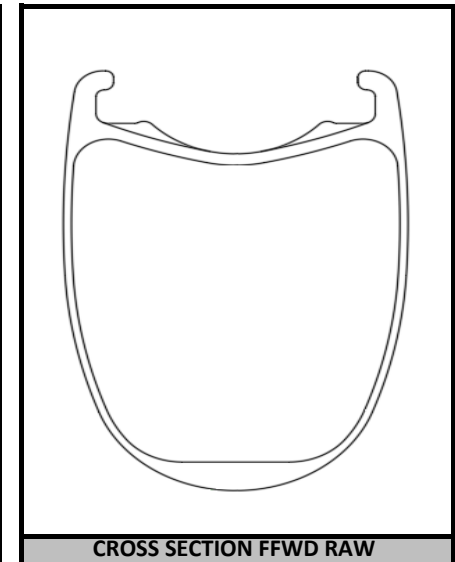

What's in the box:
→ Wheelset
→ Pre-installed tubeless tape
→ Pair of alloy tubeless valves
→ Tubeless installation instructions
→ High quality padded wheelbag

* Max. tires pressure is based on structural integrity of the rim. Always keep in mind the max. pressure of the tire.

** Weights may differ +/- 5% (due to handbuilding process of rims)

*** Interchangeable endcaps available for most common axle standards (5x100, 5x135 etc.)